

## A MESHFREE DLO FORMULATION FOR YIELD LINE ANALYSIS OF REINFORCED CONCRETE SLABS

*Le Van Canh<sup>1</sup> - Vilakone Noupaxay<sup>2</sup> - Luong Van Hai<sup>2</sup>*

### ABSTRACT

*The yield-line method of analysis is a powerful tool that can be used to rapidly estimate the limit load sustainable by a reinforced concrete slab. In recent years, it has been limited in use due to its difficulties to computerise. Consequently, the Discontinuity Layout Optimization (DLO) procedure has been proposed to provide a systematic means of automating the method. In the DLO formulation, the size of the underlying optimization is highly affected by the number of the potential yield-lines generated. In this paper the concept of domain of influence in the framework of mesh-free methods will be introduced to the DLO method, resulting an efficient DLO method that can provide accurate solutions compared with the original DLO method while the problem size is very much smaller.*

**Keywords:** Limit analysis, meshfree DLO, yield line analysis, reinforced concrete slabs.

### 1. INTRODUCTION

The yield-line method is a long-established and powerful means of estimating the ultimate capacity of concrete slabs. The method involves postulating a failure mechanism (or 'yield-line pattern') and then using work or equilibrium equations to calculate the loading required to cause collapse. Whilst benefits of the method are numerous, in use a perennial concern is that an overestimate of the true capacity will be obtained unless the correct mechanism has been identified. To address this, an automated method capable of reliably and systematically identifying critical yield-line patterns has long been sought. However, despite many attempts to automate the method (e.g. Chan, Munro & da Fonseca, Johnson etc) success has been limited. Consequently in recent years efforts have focussed principally on the development of numerical methods which

use a continuous representation of the problem fields (e.g. using finite elements [1, 2] or meshless methods [3]).

The recently developed Discontinuity Layout Optimization' (DLO) procedure [4, 5] appears to provide an opportunity to return to the inherently discontinuous analysis approach of yield-line analysis, embodied in a rigorous numerical analysis procedure. DLO has recently been found to provide a simple yet systematic and completely general means of identifying critical yield-line patterns. In order to minimize the number of initial connectivity, [4] has proposed an adaptive nodal connection procedure. Alternatively, in this paper a procedure using the concept of domain of influence similar to the one in the framework of mesh-free methods [3, 6] will be proposed. The difference between the meshfree DLO method and the original DLO method is that the

<sup>1</sup>Department of Civil Engineering, International University, VNU HCMC, Vietnam.

<sup>2</sup>Faculty of Civil Engineering, University of Technology, VNU HCMC, Vietnam.

domain of influence can limit the number of elements so that the potential yield lines and the size of the resulting optimization problem is kept minimal.

## 2. KINEMATIC FORMULATION FOR SLABS USING DLO

The general discretized kinematic DLO problem formulation may be stated as follows (after [4, 5]):

$$\lambda^+ = \min \mathbf{g}^T \mathbf{p} \quad (1a)$$

$$s.t \mathbf{Bd} = \mathbf{0} \quad (1b)$$

$$\mathbf{Np} - \mathbf{d} = \mathbf{0} \quad (1c)$$

$$\mathbf{f}_L^T \mathbf{d} = 1 \quad (1d)$$

$$\mathbf{p} \geq \mathbf{0} \quad (1e)$$

Considering the kinematic problem formulation for slabs, the contributions of a given yield-line  $i$  to the global

compatibility constraint equation (1b) can be written as:

$$\mathbf{B}_i \mathbf{d}_i = \begin{bmatrix} \alpha_i & -\beta_i & 0 \\ \beta_i & \alpha_i & 0 \\ 0 & \frac{l_i}{2} & 1 \\ -\alpha_i & \beta_i & 0 \\ -\beta_i & -\alpha_i & 0 \\ 0 & \frac{l_i}{2} & -1 \end{bmatrix} \begin{bmatrix} \theta_{ni} \\ \theta_i \\ \delta_i \end{bmatrix} \quad (2)$$

where  $\theta_{ni}$ ,  $\theta_i$  and  $\delta_i$  are respectively the normal rotation along a potential yield-line, the twisting rotation, and the out-of-plane displacement, and where  $\alpha_i$  and  $\beta_i$  are  $x$ -axis and  $y$ -axis direction cosines.

Suppose that there exists no coupling between normal and twisting rotations, and between the shear displacement along a yield-line. In this case the contributions of a given yield-line  $i$  to the global flow rule constraint (1c) can be written as:

$$\mathbf{N}_i \mathbf{p}_i - \mathbf{d}_i = \begin{bmatrix} 1 & -1 & 0 & 0 & 0 & 0 \\ 0 & 0 & 1 & -1 & 0 & 0 \\ 0 & 0 & 0 & 0 & 1 & -1 \end{bmatrix} \begin{bmatrix} p_i^1 \\ p_i^2 \\ p_i^3 \\ p_i^4 \\ p_i^5 \\ p_i^6 \end{bmatrix} - \begin{bmatrix} \theta_{ni} \\ \theta_i \\ \delta_i \end{bmatrix} \quad (3)$$

However, at a typical yield-line it can generally be assumed that the torsional (twisting) and out-of-plane displacements,  $\theta_i$  and  $\delta_i$  respectively, will be zero, and

hence these variables can be omitted from the formulation, along with their corresponding plastic multiplier variables,  $p_i^3$ ,  $p_i^4$ ,  $p_i^5$  and  $p_i^6$ . This situation does not



$$\begin{bmatrix} \frac{1}{2} & \frac{1}{2} & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \\ \frac{1}{2} & \frac{1}{2} & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} \begin{bmatrix} \theta_{AB}^+ \\ \theta_{AB}^- \\ \theta_{AC}^+ \\ \theta_{AC}^- \\ \theta_{AD}^+ \\ \theta_{AD}^- \\ \theta_{BC}^+ \\ \theta_{BC}^- \\ \theta_{DB}^+ \\ \theta_{DB}^- \\ \theta_{DC}^+ \\ \theta_{DC}^- \end{bmatrix} = 1 \quad (6)$$

If the slab is instead subject to a uniform out-of-plane pressure loading of unit intensity, the only change necessary is to replace Equation 5 with Equation 6 below:

$$\begin{bmatrix} \frac{1}{2} & \frac{1}{2} & \frac{1}{6\sqrt{2}} & -\frac{1}{6\sqrt{2}} & 0 & 0 & 0 & 0 & \frac{1}{6\sqrt{2}} & -\frac{1}{6\sqrt{2}} & 0 & 0 \\ \frac{1}{2} & \frac{1}{2} & \frac{1}{6\sqrt{2}} & -\frac{1}{6\sqrt{2}} & 0 & 0 & 0 & 0 & \frac{1}{6\sqrt{2}} & -\frac{1}{6\sqrt{2}} & 0 & 0 \end{bmatrix} \begin{bmatrix} \theta_{AB}^+ \\ \theta_{AB}^- \\ \theta_{AC}^+ \\ \theta_{AC}^- \\ \theta_{AD}^+ \\ \theta_{AD}^- \\ \theta_{BC}^+ \\ \theta_{BC}^- \\ \theta_{DB}^+ \\ \theta_{DB}^- \\ \theta_{DC}^+ \\ \theta_{DC}^- \end{bmatrix} = 1 \quad (7)$$

Once the appropriate LP problems are solved, the resulting load factors at collapse can be found to be 16 and 48 for the point load and distributed load problems defined by (6) and (7) respectively. Other methods can of course be used to identify the same values for this very coarse numerical discretization, but the novel feature of the formulation described here is that *there has been no need to explicitly add a node at the centre of the slab*, something that is clearly not the case with the element-

based methods put forward by workers such as [7] and [8].

#### 4. THE CONCEPT OF DOMAIN OF INFLUENCE IN DLO

In order to minimize the number of initial connectivity, [4] has proposed an adaptive nodal connection procedure. Alternatively, in this section we will propose a procedure using the concept of domain of influence similar to the one in the framework of mesh-free methods [3, 6]. The radius of the domain of influence may be determined by

$$R_I = \beta \cdot h_I \tag{8}$$

where  $\beta$  is the dimensionless size of influence domain, ranging from 1 to  $\max(n_x, n_y)$ , and  $h_I$  is the diagonal of a cell which can be calculated by


$$h_I = \sqrt{\left(\frac{L_x}{n_x}\right)^2 + \left(\frac{L_y}{n_y}\right)^2} \tag{9}$$

where  $L_x$  and  $L_y$  are the sizes of a slab in x and y direction;  $n_x$  and  $n_y$  are the number of elements in x and y direction, respectively.


The influence of the size of domain of influence on the potential yield-lines is illustrated by Figure 1.

**Figure 1. Potential yield-lines for different size of domain of influence**


**a)  $\beta = 1$ , 110 elements**

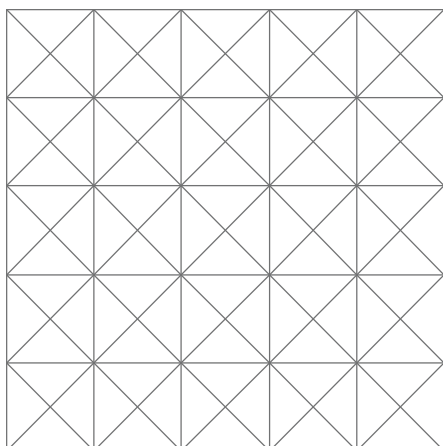


**b)  $\beta = 2$ , 190 elements**

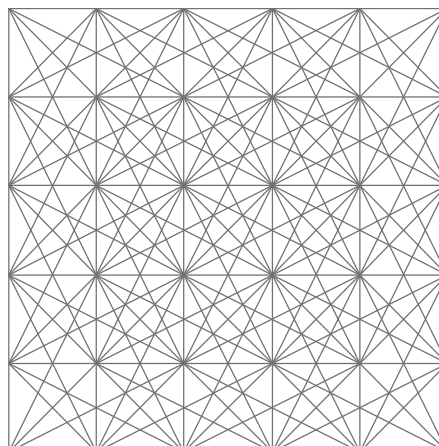

**c)  $\beta = 1$ , 338 elements**

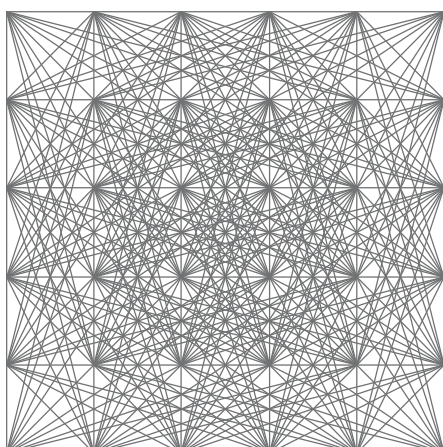

**d)  $\beta = 1$ , 398 elements**

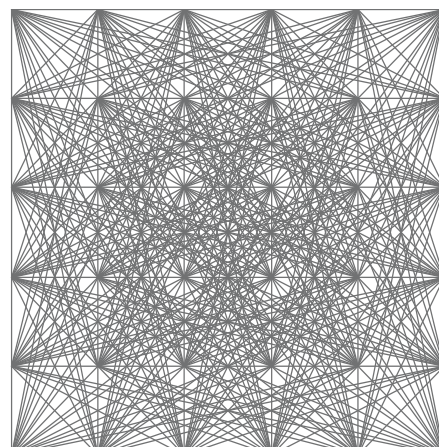

## 5. NUMERICAL EXAMPLES

The procedure will now be applied to a range of isotropically reinforced slab problems which have previously been studied in the literature, including some which have known analytical solutions.

The plastic moment is set to be unit, and Mosek optimization package will be used to obtain solutions.


The first example comprises a square slab with clamped supports on all edges. The exact solution has been identified by [9] as

$$\lambda_p = 42.851 \frac{m_p}{qL^2} \quad (10)$$

Taking advantage of symmetric geometry, the slab was solved by the upper-right quarter. The influence of the size of domain of influence is first studied and illustrated in Figure 2. It can be observed that collapse multiplier and mechanism


obtained using  $\beta$  values of 2, 3 and 4 are identical, while the number of elements (potential yield lines) in the case when  $\beta$  is equal to 2 is much smaller than the other cases ( $\beta = 3, 4$ ).

**Figure 2. The influence of the size of domain of influence**

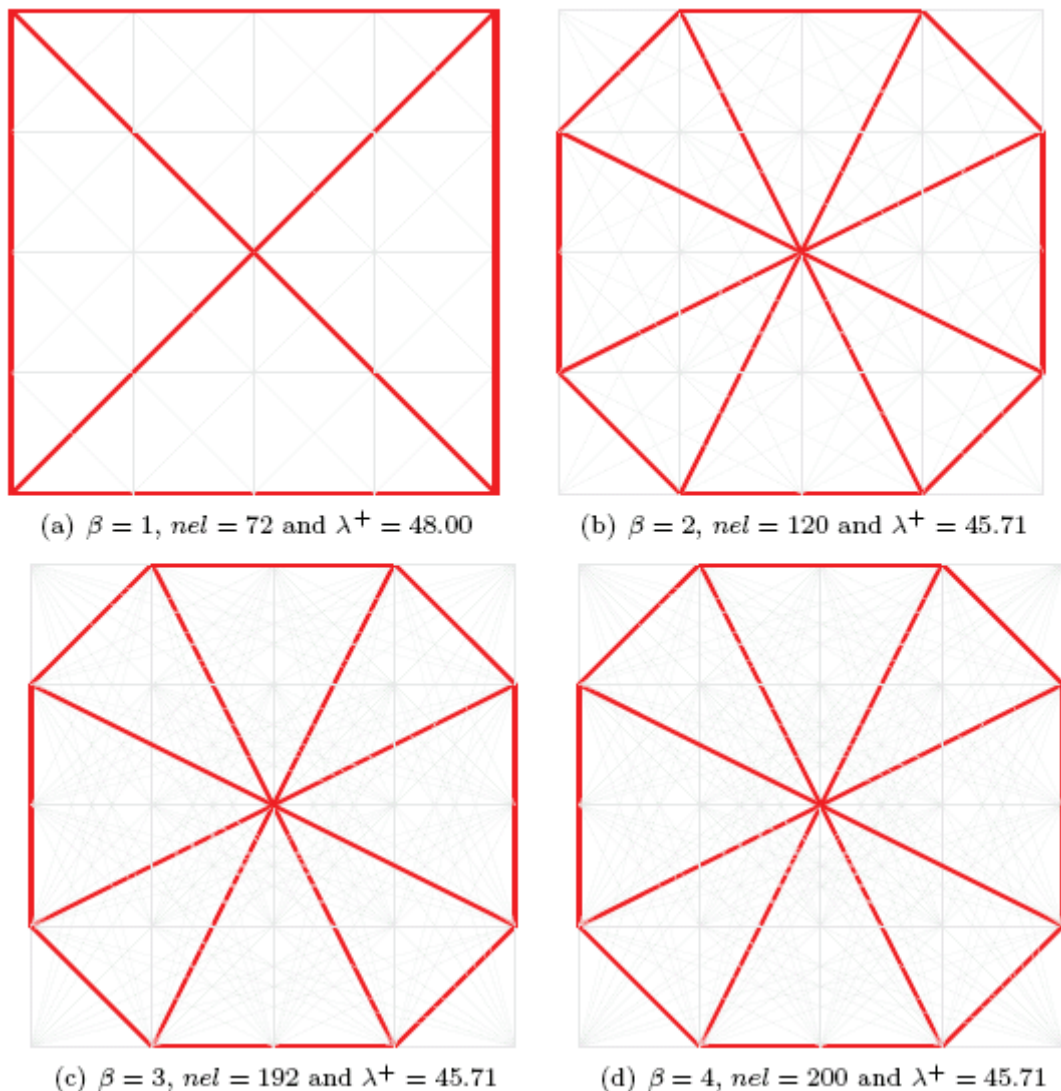

Collapse load multipliers and associated mechanisms for different number of nodes are reported in Figure 3.


**Figure 3. Fixed square slab: collapse load vs number of nodes**

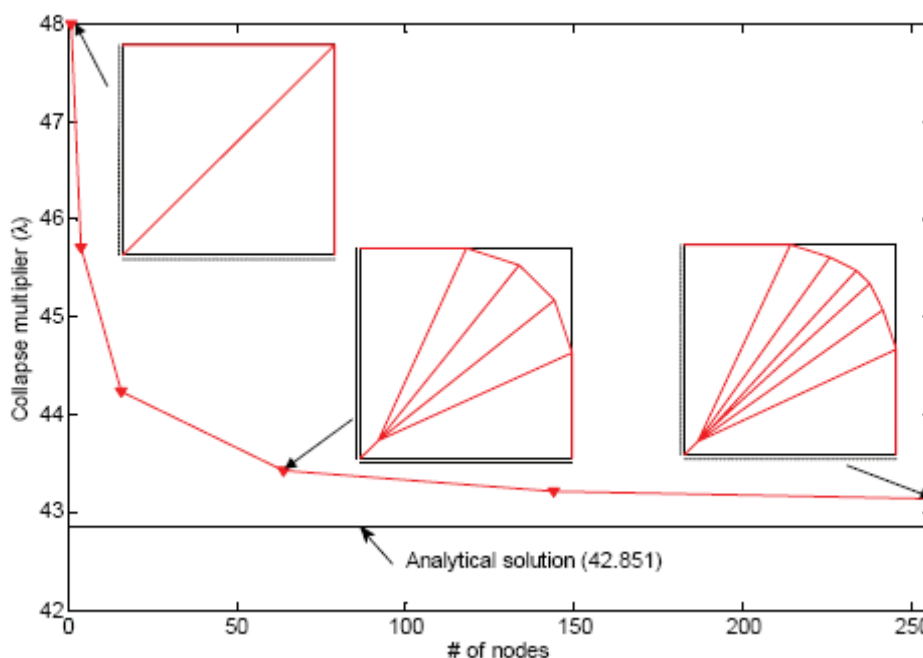

The second example is a square slab with simply supports on all edges. It is interesting to point out that the exact solution of  $(24.0 \frac{m_p}{qL^2})$  can be obtained

when only 4 nodes are employed, and the associated collapse mechanism is shown in Figure 4. In this case, the solution does not change when increasing the total number of nodes.


**Figure 4. Square slab with simply supports: collapse mechanism (green line without plastic dissipation)**

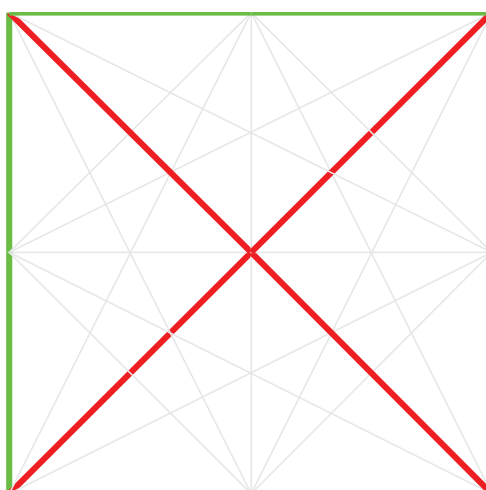

Finally, consider a square slab with 3 clamped and 1 free edges, subjected to a uniform load. The collapse load of 26.35

was obtained, and the associated collapse mechanism is plotted in Figure 5.

**Figure 5. A square slab with 3 clamped and 1 free edges: collapse mechanism**

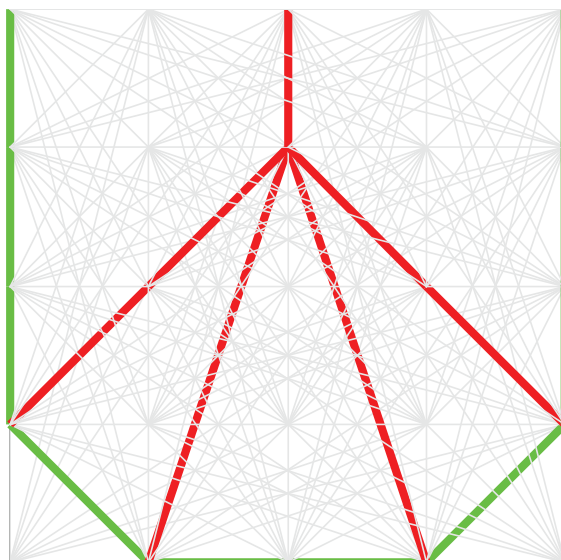

## 6. CONCLUSION

A meshfree DLO method for yield-line analysis of reinforced concrete slabs has been described. The concept of domain of influence in the framework of mesh-free methods is introduced to the DLO method, ensuring that the size of the underlying optimization is reduced by minimizing the number of the potential yield-lines generated. Various examples

were examined to show that the meshfree DLO based procedure can provide accurate solutions for engineering practice problems.

## ACKNOWLEDGMENTS

The authors acknowledges the support of Vietnam National Foundation for Science and Technology Development (NAFOSTED) under grant reference 107.02-2011.01.

## REFERENCES

1. H. Ciria, J. Peraire, and J. Bonet. Mesh adaptive computation of upper and lower bounds in limit analysis. *International Journal for Numerical Methods in Engineering*, 75:899-944, 2008.
2. J. J. Munoz, J. Bonet, A. Huerta, and J. Peraire. Upper and lower bounds in limit analysis: Adaptive meshing strategies and discontinuous loading. *International Journal for Numerical Methods in Engineering*, 77:471-501, 2009.
3. C. V. Le, M. Gilbert, and H. Askes. Limit analysis of plates using the EFG method and second-order cone programming. *International Journal for Numerical Methods in Engineering*, 78:1532-1552, 2009.
4. C.C. Smith and M. Gilbert. Application of discontinuity layout optimization to plane plasticity problems. *Proc. Royal Society A*, 463(2086):2461-2484, 2007.

5. M. Gilbert, C.C. Smith, C.V. Le, and H.M Ahmed. Yield-line analysis of slabs using discontinuity layout optimization. submitted.
6. T. Belytschko, Y. Y Lu, and L. Gu. Element-Free Galerkin methods. *International Journal for Numerical Methods in Engineering*, 37:229-256, 1994.
7. H.S.Y. Chan. The collapse load of reinforced concrete plates. *Int. J. Numer. Meth. Engng*, 5(2):57-64, 1972.
8. J. Munro and A.M.A. Da Fonseca. Yield line method by finite elements and linear programming. *The Structural Engineer*, 56B(2):37-44, 1978.
9. E. N. Fox. Limit analysis for plates: the exact solution for a clamped square plate of isotropic homogeneous material obeying the square yield criterion and loaded by uniform pressure. *Philosophical Transactions of The Royal Society of London, Series A, Mathematical and Physical Sciences*, 227:121-155, 1974.